


**Specifications**

**Model Number:** 10-0035C  
**Input Voltage:** 220/240v AC  
**Frequency:** 50/60 Hz.  
**Lamp Types:** See Chart On Next Page  
**Certifications:** RoHS  
**Size:** 6.25" (Max) x 2.5" x 1.75"  
**Weight:** 11 oz.  
**Mounting:** slotted mounting tabs  
**Special Features:** Green LED



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

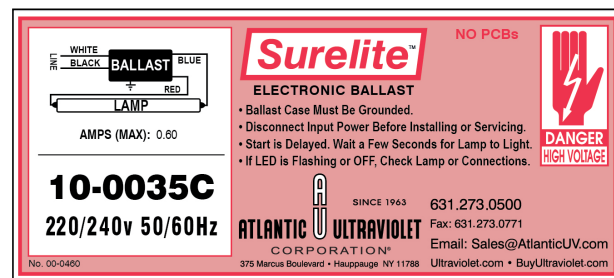

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

Instant Start Lamps	Preheat Lamps
G12T5L	GPH212T5L
G10T5½L	GPH238T5L
G18T5L	GPH250T5L
G18T5L/U	GPH254T5L
G24T5L	GPH287T5L
G24T5L/U	GPH303T5L
G30T5L	GPH330T5L
G30T5L/U	GPH357T5L
G36T5L	GPH436T5L
G36T5L/U	GPH450T5L
G37T5L	GPH463T5L
G48T5L	GPH620T5L/4
G48T5L/U	GPH793T5L/4
G64T5L	GPH810T5L/4
G64T5L/U	GPH843T5L/4

Lamps listed are Low Ozone type but Ozone Producing lamps in these same lengths can also be used. This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

**Connections**

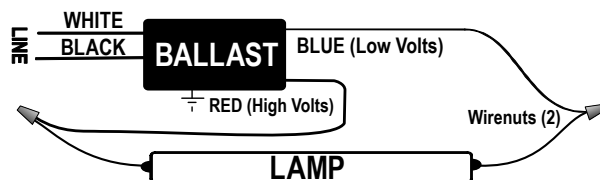


Figure 1- Typical Connections from Ballast for use with Instant Lamps

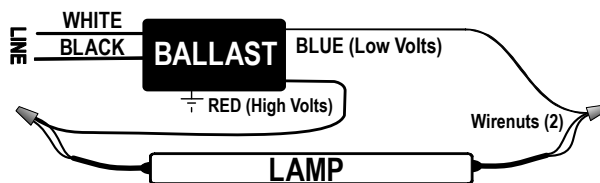


Figure 2- Typical Connections from Ballast for use with Preheat Lamps

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.