


Specifications

Model Number: 10-1179
Input Voltage: 120 to 277v AC
Frequency: 50/60 Hz.
Lamp Type: See Chart on Next Page
Size: 5" x 3" x 1.29"
Weight: 16 oz.
Mounting: Slotted Mounting Tabs

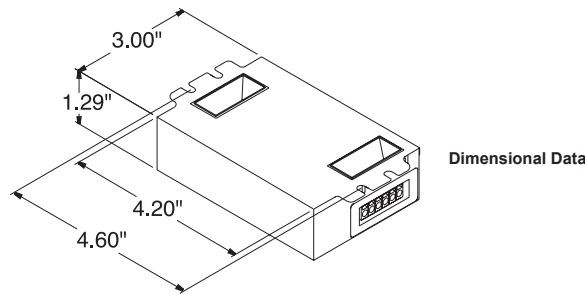

INTELLIVOLT
120V TO 277V 50/60Hz

LAMP TYPE	LINE CURRENT	MIN START TEMP.
(2) PL-L 36W/TUV	0.55A 0.24A	0°F

Also compatible with:
 (1) PL-L 36W/TUV

WARNING: Install in accordance with National and Local Electrical Codes. Use 18AWG Solid Copper Wire, Rated >= 600V. Strip wire to 3/8".

4435 290 36591 REV. A

120V to 277V

PHILIPS ADVANCE
Technical Information 1.800.372.3331
Rosemont, IL

PureVOLT™
IUUV-2S36-M2-LD
Programmed Start Electronic Ballast

ASSEMBLED IN MEXICO

Lamp EOL Protection
 Ballast a Semi-Conducteur
 High Power Factor
 Class P Sound Rated A
 Type 1 Outdoor
 Inherent Thermal Protection
 Protection Thermiques Integrees
 No PCB's

UL LISTED 7046

RoHS COMPLIANT

WIRING: (2) CFL LAMPS (1) CFL LAMP

LINE: BLACK, GREEN
 BALLAST: BLUE, YELLOW, RED
 (1) CFL LAMP: BLUE, RED

GROUNDING: Green terminal or ballast case must be grounded.
ONLY USE 6-PIN DAY-START SOCKETS

7 81087 04507 7

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


Lamp Types

Lamp Types	Qty.
PL-L36W/TUV (36W)	1 or 2

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

Connections

Figure 1 - Wiring Diagram

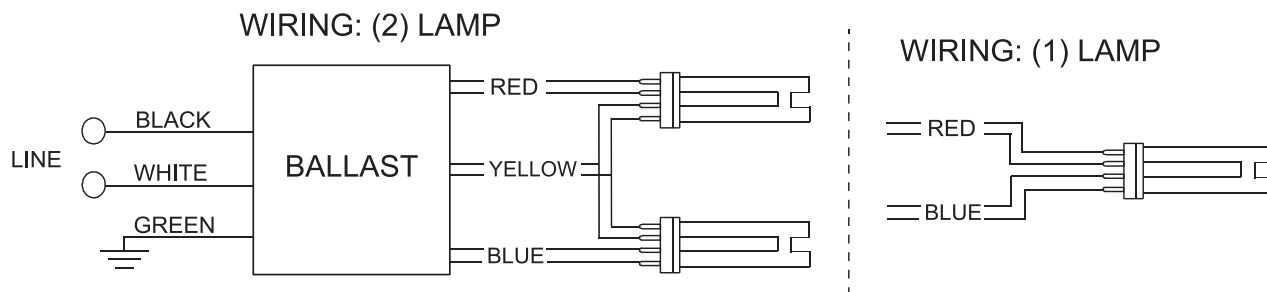

BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED
For use in permanently connected (fixed) equipment only

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.