
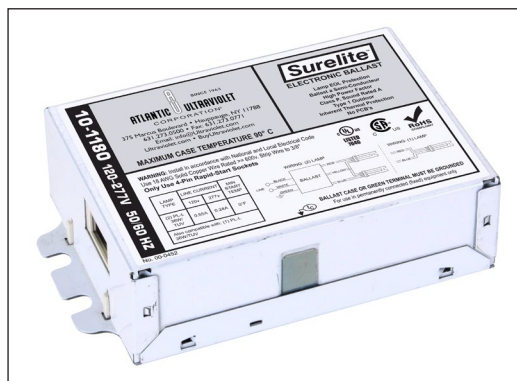


Specifications

Model Number: 10-1180
Input Voltage: 120 to 277v AC
Frequency: 50/60 Hz.
Lamp Type: See Chart on Next Page
Size: 5" x 3" x 1.29"
Weight: 16 oz.
Mounting: Slotted Mounting Tabs

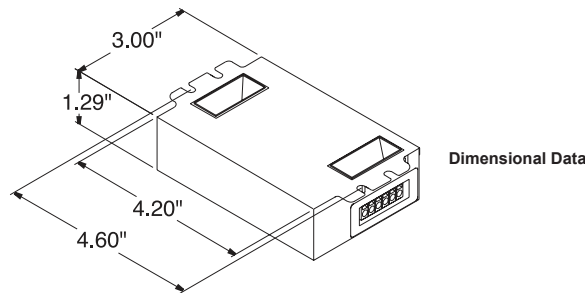

10-1180 120-277V 50/60 HZ	SINCE 1963 ATLANTIC ULTRAVIOLET CORPORATION 375 Marcus Boulevard • Hauppauge, NY 11788 631.273.0500 • Fax: 631.273.0771 Email: info@ultraviolet.com Ultraviolet.com • BuyUltraviolet.com	Surelite™ ELECTRONIC BALLAST Lamp EOL Protection Ballast a Semi-Conductor High Power Factor Class P, Sound Rated A Type 1 Outdoor Inherent Thermal Protection No PCB's						
	MAXIMUM CASE TEMPERATURE 90° C							
<p>WARNING: Install in accordance with National and Local Electrical Code Use 18 AWG Solid Copper Wire Rated ≥= 600v. Strip Wire to 3/8" Only Use 4-Pin Rapid-Start Sockets</p>								
<table border="1"> <thead> <tr> <th>LAMP TYPE</th> <th>LINE CURRENT</th> <th>MR START TEMP</th> </tr> </thead> <tbody> <tr> <td>(2) PL-L 30W/ TUV</td> <td>0.55A 0.24A</td> <td>0°F</td> </tr> </tbody> </table> <p>Also compatible with: (1) PL-L 36W/TUV</p>	LAMP TYPE	LINE CURRENT	MR START TEMP	(2) PL-L 30W/ TUV	0.55A 0.24A	0°F	<p>WIRING: (2) LAMP</p> <p>WIRING: (1) LAMP</p> <p>BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED For use in permanently connected (fixed) equipment only</p>	
LAMP TYPE	LINE CURRENT	MR START TEMP						
(2) PL-L 30W/ TUV	0.55A 0.24A	0°F						
No. 00-0452								

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


Lamp Types

Lamp Types	Qty.
GPH212T5 – GPH843T5	1 or 2

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

Connections

Figure 1 - Wiring Diagram

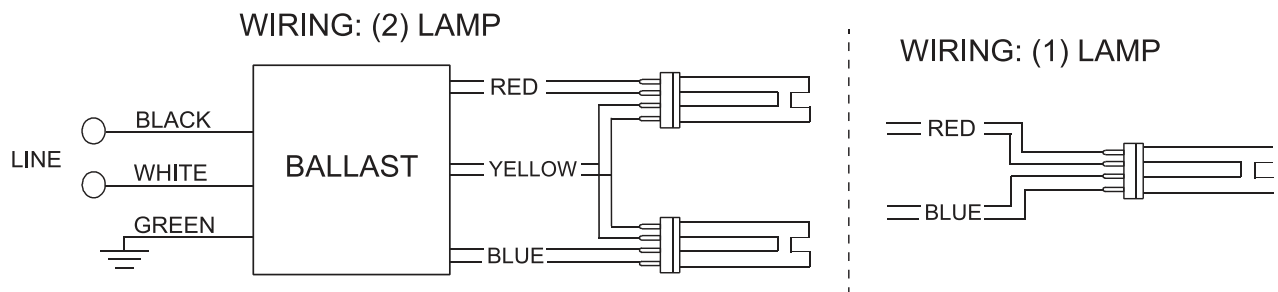

**BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED
For use in permanently connected (fixed) equipment only**

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.