



Specifications

Model Number: 10-0185
Input Voltage: 120v AC
Frequency: 50/60 Hz
Lamp Types: See Chart on Next Page
Size: 6.5" x 1.5" x 1.0"
Weight: 10 oz
Mounting: Slotted Mounting Tabs




120V 50/60 HZ 10-0185	 Surelite™ ELECTRONIC BALLAST	<p>INPUT: 120v AC 50/60 HZ INPUT CURRENT: 0.53 A RFI, EMI: FCC Part 18 Class A SOUND RATING: A CLASS: P TYPE: 1 or 2 Outdoor MAX. VOLTAGE OUTPUT CIRCUIT OR TO GROUND: < 600v AC MIN. BALLAST START: -20°C (-4°F) INSTANT START HIGH POWER FACTOR</p>	<p style="text-align: right;">70-0087A</p>  375 Marcus Boulevard, Hauppauge, NY 11788 (631) 273-0500 • Email: Sales@AtlanticUV.com AtlanticUltraviolet.com • Ultraviolet.com See spec sheet for lamp and wiring information.
<p>TYPE "HL" APPROVED, SUITABLE FOR "AIR HANDLING SPACES"</p> <p>⚠ WARNING Install in accordance with the National Electric Code. Disconnect power before servicing. Ballast must be grounded.</p>			

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


Connections

Ground case in accordance with the National Electric Code. Cap and insulate any unused red wire individually.

Lamp Types	Wiring Diagram
GHO357T5–GHO30T5	1
GPH357T5/HO–GPH609T5/HO	2

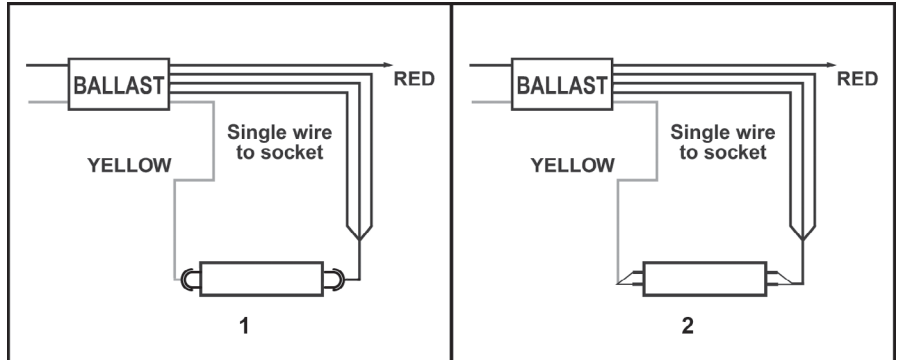


Lamp Types	Wiring Diagram
G15T8, G30T8	3

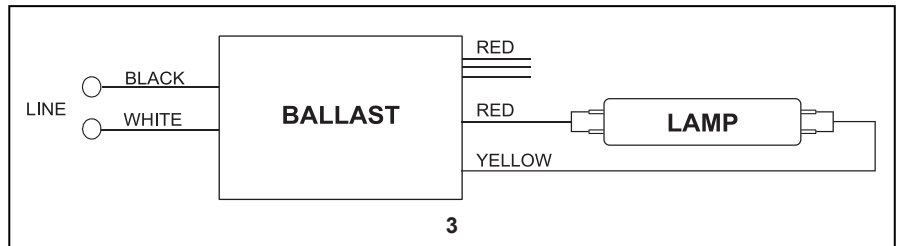

Wiring Jumper Detail

For Medium Bipin Lamps, add jumper between socket contacts, of the lampholder, before connecting the RED and YELLOW wires.

For 4-Pin Lamp Connections, Contact Factory

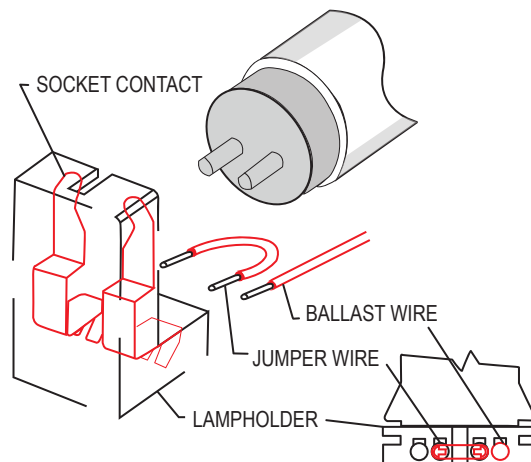

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.