


**Specifications**

**Model Number:** 10-0264  
**Input Voltage:** 120 to 277v AC  
**Frequency:** 50/60 Hz.  
**Lamp Type:** See Chart on Next Page  
**Certifications:** RoHS  
**Size:** 10" x 2.55" x 1.26"  
**Weight:** 2 lbs. 1 oz  
**Mounting:** Slotted Mounting Tabs

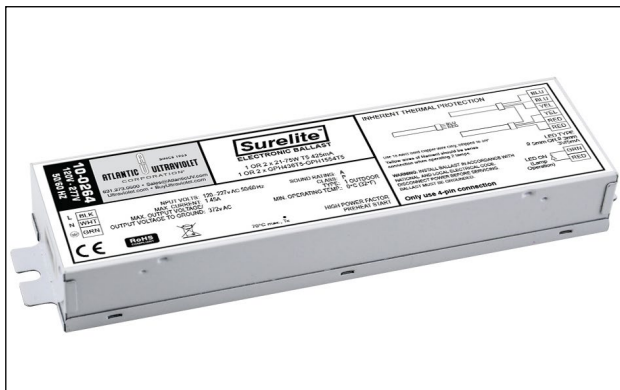

<b>10-0264</b> 120V - 277V 50/60 HZ	ATLANTIC ULTRAVIOLET CORPORATION SINCE 1963 631.273.0500 • Sales@AtlanticUV.com Ultraviolet.com • BuyUltraviolet.com	<b>Surelite™</b> ELECTRONIC BALLAST 1 OR 2 x 21-T5W T5 425mA 1 OR 2 x GPH436T5-GPH1554T5	<b>INHERENT THERMAL PROTECTION</b> 
	L BLK N WHT GRN	INPUT VOLTS: 120-277v AC 50/60 Hz MAX. CURRENT: 1.45A MAX. OUTPUT VOLTAGE/ OUTPUT VOLTAGE TO GROUND: 372v AC SOUND RATING: A CLASS: P TYPE: 1 OUTDOOR MIN. OPERATING TEMP.: 0°C (32°F)	Use 18 AWG Solid Copper Wire Only, Stripped To 3/16" Yellow wires of filament should be series connection when operating 2 lamps. LED TYPE: Ø 5mm OR Ø 3mm 3V75mA LED ON (Lamp Operation) GRN RED


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

Lamp Types	Qty.
GPH436T5 – GPH1554T5	1 or 2
TUV36W (05-0582)	1 or 2


**Dimensions**

**Figure 1 - Dimensional Data**

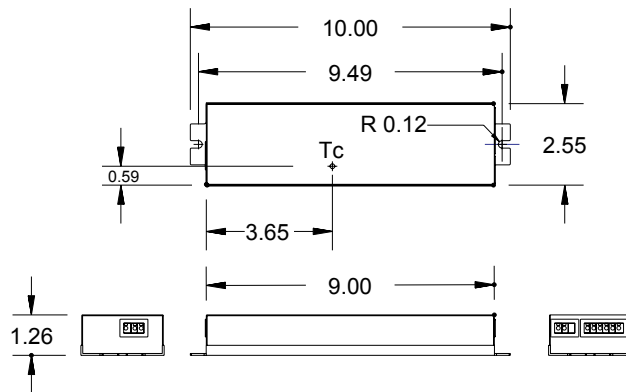

**Connections**

**Figure 2 - Wiring Diagram**

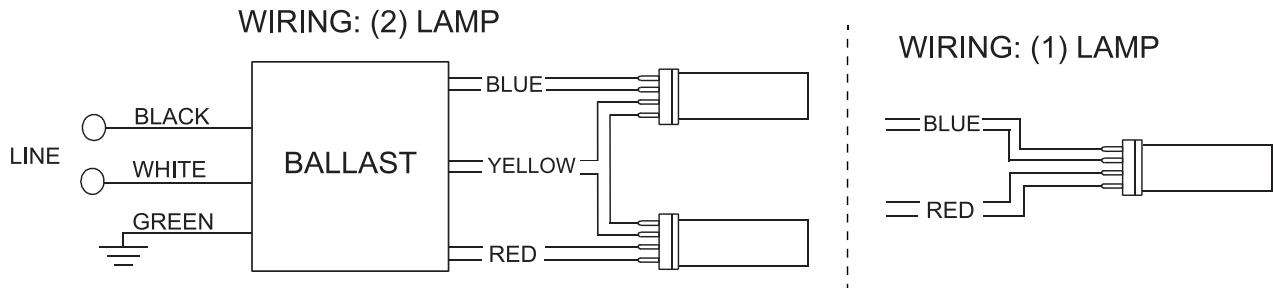

**BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED**  
**For use in permanently connected (fixed) equipment only**