

**Specifications**

**Model Number:** 10-1520  
**Input Voltage:** 99 to 264v AC  
**Frequency:** 50/60 Hz.  
**Lamp Type:** See Chart on Next Page  
**Size:** 7.9" x 2.5" x 1.1"  
**Weight:** 15.87 oz.  
**Mounting:** Slotted Mounting Tabs.

1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

**ELECTRONIC BALLAST FOR UV LAMPS**

**PN 10-1520**  
**110 to 240V 50/60Hz**  
 Max Current 1.42A @ 110V or 0.65A @ 240V

Lamp Power: 2 x 40-80W OR 1 x 90-155W  
 Lamp Current: 0.75-0.85A  
 PF(A) > 0.98  
 Ambient Temperature: 0-40°C

STATUS INDICATION: 5V DC ON NORMAL & 0V DC ON ABNORMAL. DISCONNECT INPUT POWER BEFORE INSTALLING OR SERVICING. BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDING.




The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

Lamp Types	Qty.
GPH436T5/HO	1 or 2
TUV36T5LHO	1 or 2
GHO36T5/4P	1 or 2
GPH843T5/HO	1 or 2
GHO64T5/4P	1
GPH1148T5/HO	1
GPH1554T5/HO	1

This ballast may be acceptable for use with lamps not listed here.  
Contact us to discuss your requirement.

**Connections**

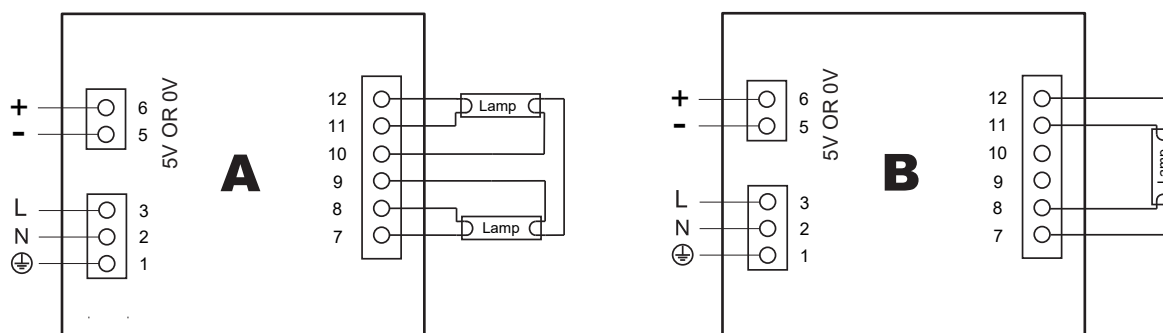

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.