

**Specifications**

**Model Number:** 10-0231  
**Input Voltage:** 120 to 277 VAC  
**Frequency:** 50/60 Hz.  
**Lamp Types:** See Chart on Next Page  
**Certifications:** CSA, UL #E191525 / RoHS  
**Size:** 11-11/16" x 3-3/32" x 1-13/16"  
**Weight:** 4.3 lbs.  
**Mounting:** Screw Holes on Mounting Tabs  
**Special Features:** Can Operate 1 or 2 HO Lamps



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.



<b>10-0231</b> 120-277V 50/60 HZ	<p>ATLANTIC U CORPORATION®          375 Marcus Blvd.          Hauppauge, NY 11788          631.273.0500          info@ultraviolet.com          ultraviolet.com          buyultraviolet.com          No. 00-0277</p>		<p><b>Surelite™</b>          ELECTRONIC BALLAST</p>			
	<p>Electronic Ballast High Power Factor          Part No: 10-0231 No PCBs          Volts: 120-277 Open Circuit Volts:          Hertz: 50/60 620 VAC</p>		<p>PARALLEL WIRING ONLY, BALLAST CASE MUST BE GROUNDED          FOR USE WITH ONE (1) OR TWO (2) GH036T5-GH064T3 U.V. LAMPS          FOR ONE LAMP APPLICATIONS, CAP UNUSED BLUE LEAD, INSULATE 600V          DISCONNECT ALL INPUT POWER BEFORE INSTALLING OR SERVICING</p>			

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


**Lamp Types**

G10T5HO
GPH357T5/HO
GPH436T5/HO
G36T5HO
GPH843T5/HO
G64T5HO
GPH1554T5/HO


This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

**Connections**

Single Pin Wiring Diagram

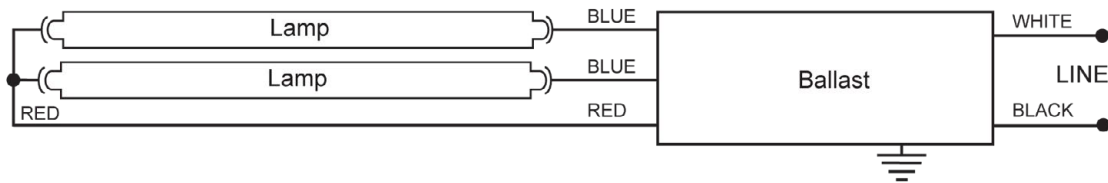

4 Pin Wiring Diagram

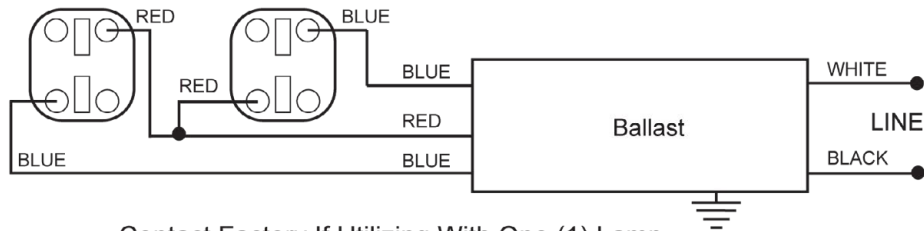

Contact Factory If Utilizing With One (1) Lamp.