


Specifications

Model Number:	10-0161
Input Voltage:	120v AC
Frequency:	50/60 Hz.
Lamp Types:	See Chart on Next Page
Size:	3.3" x 1.75" x 1"
Weight:	7 oz.
Mounting:	Slotted Mounting Tabs

1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

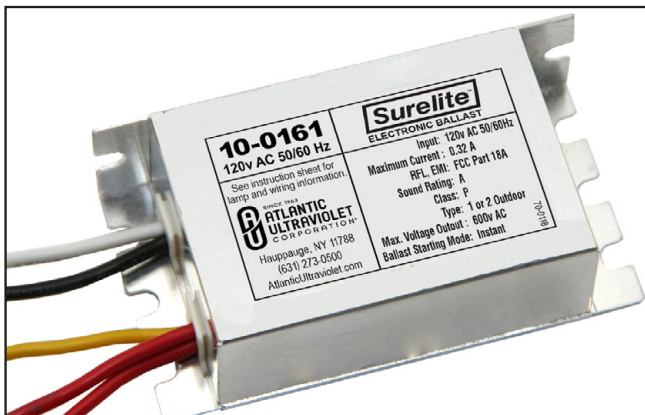

<p>10-0161 120v AC 50/60 Hz</p> <p>See instruction sheet for lamp and wiring information.</p> <p>ATLANTIC ULTRAVIOLET CORPORATION®</p> <p>Hauppauge, NY 11788 (631) 273-0500 AtlanticUltraviolet.com</p>	<p>Surelite™ ELECTRONIC BALLAST</p> <p>Input: 120v AC 50/60Hz Maximum Current : 0.32 A RFL, EMI: FCC Part 18A Sound Rating: A Class: P Type: 1 or 2 Outdoor Max. Voltage Outout : 600v AC Ballast Starting Mode: Instant</p> <p>70-0118</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Lamp Types

Lamp Types	Wiring Diagram
GPH212T5	1
G12T5	2
GPH330T5	1
G10T5½	2
GPH357T5	1
G18T5	2
GPH436T5	1
GPH463T5	1
GPH550T5	1
G24T5	2
GPH620T5/4	1

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

Contact Factory for 4-Pin Single Ended Wiring Options.

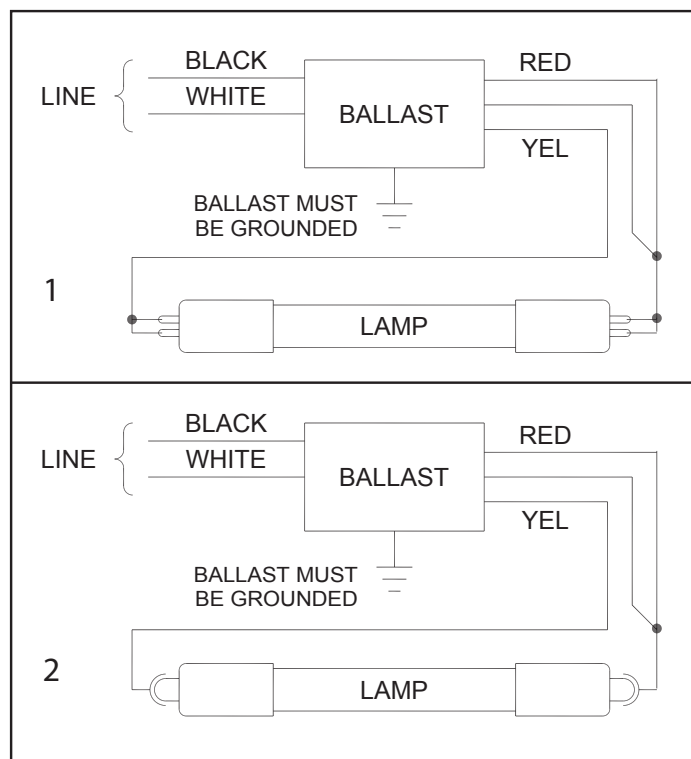

Wiring Diagrams