

Specifications

Model Number: 10-0053C-R
Input Voltage: 220/240v AC
Frequency: 50/60 Hz.
Certification: RoHS
Lamp Types: See Chart On Next Page
Size: 6.375" (Max) x 2.5" x 1.75"
Weight: 11 oz.
Mounting: 2 screws through slotted mounting tabs
Special Features: Green LED



	<p>Surelite™ NO PCBs</p> <p>ELECTRONIC BALLAST</p> <p>BALLAST CASE MUST BE GROUNDED. DISCONNECT INPUT POWER BEFORE INSTALLING OR SERVICING. START IS DELAYED. WAIT A FEW SECONDS FOR LAMP TO LIGHT. IF LED IS FLASHING OR OFF, CHECK LAMP OR CONNECTIONS.</p> <p>10-0053C-R 220/240v 50/60Hz</p> <p>631.273.0500 Fax: 631.273.0771 e-mail: info@ultraviolet.com www.ultraviolet.com</p> <p>ATLANTIC ULTRAVIOLET CORPORATION 375 Marcus Boulevard, Hauppauge, NY 11788</p>
--	---


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Lamp Types

Preheat - Low Ozone	Preheat - Ozone Producing
GPH212T5L	GPH212T5VH
GPH238T5L/4	GPH238T5VH/4
GPH250T5L/4	GPH250T5VH/4
GPH254T5L	GPH254T5VH/4
GPH275T5L/4	GPH275T5VH/4
GPH287T5L	GPH287T5VH
GPH303T5L	GPH303T5VH
GPH330T5L/4	GPH330T5VH/4
GPH357T5L	GPH357T5VH
GPH436T5L	GPH436T5VH
GPH450T5L/4	GPH450T5VH/4
GPH463T5L	GPH463T5VH
GPH620T5L/4	GPH620T5VH/4
GPH650T5L/4	GPH650T5VH/4
GPH793T5L	GPH793T5VH
GPH810T5L/4	GPH810T5VH/4

Note that ballast will operate these lamps in various pin configurations and shapes.
 This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

Connections

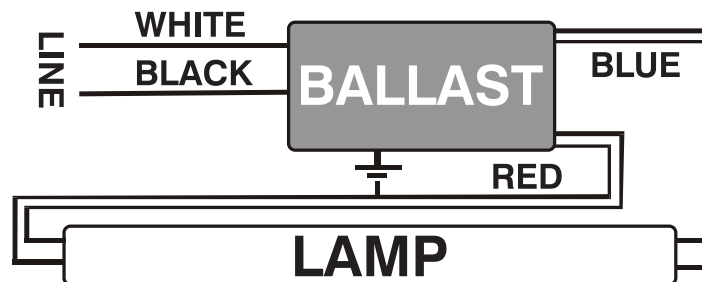

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.