


Specifications

Model Number:	10-0519
Input Voltage:	120v–277v
Frequency:	50/60 Hz.
Designed for:	Steril-Aire GTSVO Series
Size:	7.5" x 2.36" x 1.2"
Weight:	1lb 7oz
Mounting:	Slotted Mounting Tabs

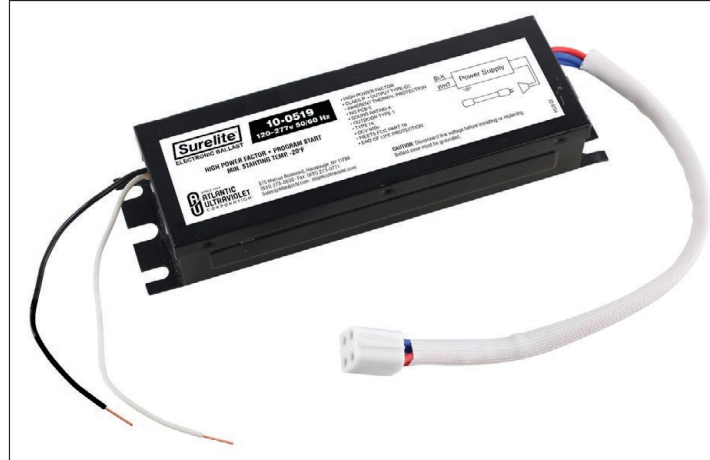

Surelite™
ELECTRONIC BALLAST


10-0519
120–277v 50/60 Hz

HIGH POWER FACTOR • PROGRAM START
MIN. STARTING TEMP. -20°F

SINCE 1963
**ATLANTIC
ULTRAVIOLET**
CORPORATION®

375 Marcus Boulevard, Hauppauge, NY 11788
(631) 273-0500 • Fax: (631) 273-0771
Sales@AtlanticUV.com • AtlanticUltraviolet.com

- HIGH POWER FACTOR
- CLASS P • OUTPUT TYPE-CC
- INHERENT THERMAL PROTECTION
- NO PCB'S
- SOUND RATING A
- OUTDOOR TYPE 1
- TYPE HL
- OCV 600v
- MEETS FCC PART 18
- END OF LIFE PROTECTION




CAUTION: Disconnect line voltage before installing or replacing.
Ballast case must be grounded.

70-0154

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Connections

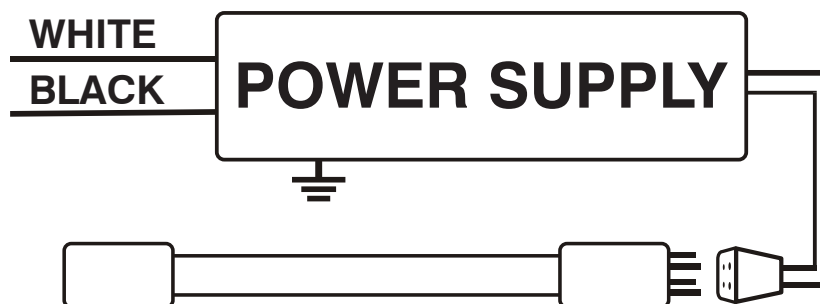

Comes Pre-Wired with 4-Pin Socket

Steril-Aire Lamps:
21000100
21000200
21000300
21000400
21000500
21000600

Operates high-output preheat lamps within this range:
GPH410T5/HO/4P – GPH1067T5/HO/4P