



10-0185 - Surelite™ Electronic Ballast

Specifications .

Model Number: 10-0185 Input Voltage: 120v AC Frequency: 50/60 Hz

Lamp Types: See Chart on Next Page

Size: 6.5" x 1.5" x 1.0"

Weight: 10 oz

Mounting: Slotted Mounting Tabs





Surelite*
ELECTRONIC BALLAST

TYPE "HL" APPROVED, SUITABLE FOR "AIR HANDLING SPACES"

▲ WARNING Install in accordance with the National Electric Code. Disconnect power before servicing. Ballast must be grounded. INPUT: 120v AC 50/60 HZ
INPUT CURRENT: 0.53 A
RFI, EMI: FCC Part 18 Class A
SOUND RATING: A
CLASS: P
TYPE: 1 or 2 Outdoor
MAX. VOLTAGE OUTPUT
CIRCUIT OR TO GROUND: < 600v AC
MIN. BALLAST START: -20°C (-4°F)
INSTANT START



375 Marcus Boulevard, Hauppauge, NY 11788 (631) 273-0500 • Email: Sales@AtlanticUV.com AtlanticUltraviolet.com • Ultraviolet.com

See spec sheet for lamp and wiring information.

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.






10-0185 - Surelite™ Electronic Ballast


Connections _____

Ground case in accordance with the National Electric Code. Cap and insulate any unused red wire individually.

Lamp Types	Wiring Diagram
GHO357T5-GHO30T5	1
GPH357T5/HO-GPH609T5/HO	2

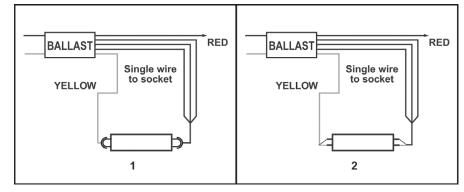


Lamp Types	Wiring Diagram
G15T8. G30T8	3

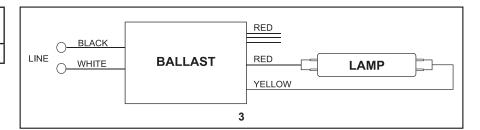

Wiring Jumper Detail

For Medium Bipin Lamps, add jumper between socket contacts, of the lampholder, before connecting the RED and YELLOW wires.

For 4-Pin Lamp Connections, Contact Factory



The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.