
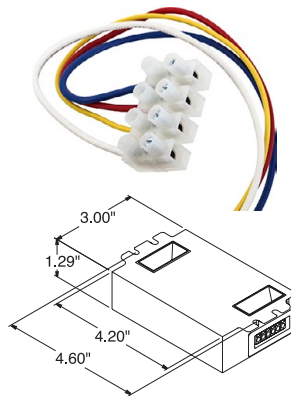


## Specifications

<b>Kit Model Number:</b>	<b>10-1181A</b>
<b>Input Voltage:</b>	120 to 277v AC
<b>Frequency:</b>	50/60 Hz.
<b>Lamp Type:</b>	See Chart on Next Page
<b>Size:</b>	5" x 3" x 1.29"
<b>Weight:</b>	16 oz.
<b>Mounting:</b>	Slotted Mounting Tabs

**10-1180 Ballast is Wired to be a Compatible Replacement for:  
 AQUA-PURE UVBA-1X**

**Model Number 10-1181A to Order Complete Ballast Kit**

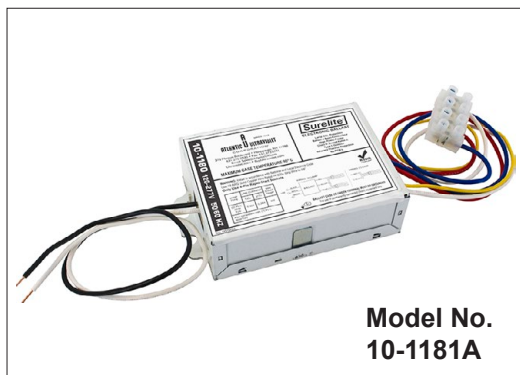

70-0049A

**10-1180 120-277v 50/60 Hz**

SINCE 1963  
**ATLANTIC  
 ULTRAVIOLET**  
 CORPORATION®

(631) 273-0500 • Fax: (631) 273-0771  
 Email: Sales@AtlanticUV.com  
 AtlanticUltraviolet.com  
 375 Marcus Blvd., Hauppauge, NY 11788  
 MAXIMUM CASE TEMPERATURE 90°C

**Surelite™**  
 ELECTRONIC BALLAST

Lamp EOL Protection  
 Ballast a Semi-Conductor  
 High Power Factor  
 Class P, Sound Rated A  
 Type 1 Outdoor  
 Inherent Thermal Protection  
 No PCBs

**WARNING:** Install in accordance with National and Local Electrical Code  
 Use 18 AWG Solid Copper Wire Rated >= 600v. Strip Wire to 3/8"  
 Only Use 4-Pin Rapid-Start Sockets

LAMP TYPE	LINE CURRENT	MIN START TEMP
(2) PL-L 35W TUV	0.55A 0.34A	0°F

Also compatible with (1) PL-L 35W TUV

WIRING: (2) LAMP

WIRING: (1) LAMP

BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED  
 For use in permanently connected (fixed) equipment only

RoHS COMPLIANT

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

**Lamp Types**

---

Lamp Types	Qty.
GPH810T5L/4	1

***10-1180 Ballast is Wired to be a Compatible Replacement for:***  
**AQUA-PURE UVBA-1X**

This ballast may be acceptable for use with lamps not listed here.  
Contact us to discuss your requirement.

**BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED**  
**For use in permanently connected (fixed) equipment only**