


Specifications

Model Number:	10-0101-R
Input Voltage:	120v AC
Frequency:	50/60 Hz.
Designed for:	MINIPURE® Models MIN-1, MIN-1.5, MIN-3, MIN-6, MIN-9 Bio-Logic® Models BIO-1.5 & BIO-3.0 — Requiring Dry Contact
Lamp Failure Indicator:	A green LED is mounted on output end of case. It lights steadily when lamp is OK but flashes when lamp is inoperative or removed.
Size:	6 ¼" x 2 ½" x 1 ¾"
Weight:	1 lb. 5 oz.
Mounting:	Slotted Mounting Tabs



The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Connections

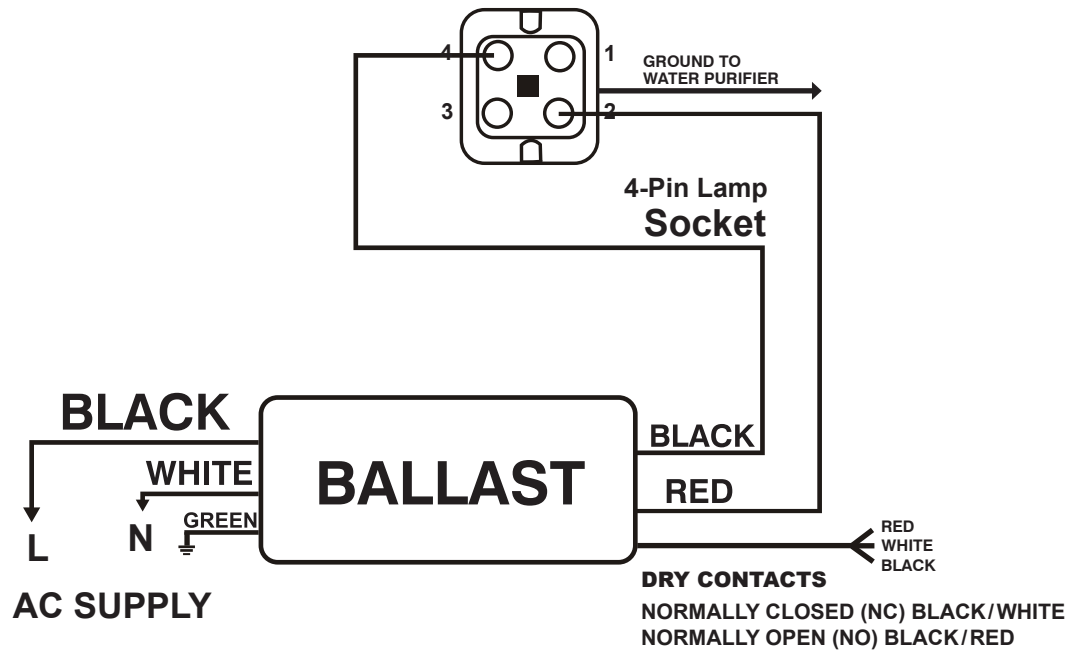

Bio-Logic® and MINIPURE® Lamps
GPH212T5L/4
GPH287T5L/4
GPH436T5L/4
GPH620T5L/4

***Ballast designed to be utilized with Bio-Logic® and MINIPURE® but can operate lamps up to 75 watts.
Contact factory for assistance.**