

Specifications

Model Number:	10-0201
Input Voltage:	120v AC
Frequency:	50/60 Hz.
Lamp Types:	See Chart On Next Page
Certifications:	CSA UL #E191525
Size:	11.73" x 3.23" x 1.23"
Weight:	32.8 oz.
Mounting:	Slotted Mounting Tabs



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type; consult factory with requirements.



10-0201
120V 50/60 HZ

ATLANTIC ULTRAVIOLET CORPORATION®

375 Marcus Boulevard • Hauppauge, NY 11788
(631) 273-0500 • Fax: (631) 273-0771
Sales@AtlanticUV.com • Ultraviolet.com
BuyUltraviolet.com Inherent Thermal Protection

Danger High Voltage! TYPE "HL" APPROVED

WARNING: Install in accordance with the national and local electrical code. Disconnect power before servicing. Ballast must be grounded.

ATTENTION: L'installation doit être conforme aux normes du code national électrique. Débranchez l'alimentation avant l'entretien. Le ballast doit être mis à la terre.

120V HIGH POWER FACTOR

MAXIMUM CURRENT: 1.50A
SOUND RATING: A
CLASS: P
TYPE: 1 or 2 Outdoor
MAX. VOLTAGE OUTPUT: 600VAC
CIRCUIT OR TO GROUND: 600VAC
MIN. BALLAST START: -20°F
MIN. LAMP START: See Lamp Specs

APPROVED FOR LAMP COMBINATIONS OF 220W MAX. WATTS OF 00, FGD, 2D, 8X, T5 COILS LINEAR, F48T10W, T12W, T5HO, T8, T12HO, T8HO, T10, T12LAMPs. WHEN USED PER WIRING DIAGRAM SUITABLE FOR "AIR HANDLING SPACES".

When this ballast is used outside of Canada or if only used in the United States, this ballast is approved for additional lamp types:
T5 COILS LINEAR, T5HO

For use in permanently connected/fixed equipment only.
For use only with a compact, circular lamp, U-bend or a similar lamp that would employ a lampholder arrangement that disconnects all lamp contacts simultaneously.
Visit ultraviolet.com/wiringdiagrams for instructions and wiring diagram.

Surelite™
ELECTRONIC BALLAST

RoHS COMPLIANT

UL US
#E191525
FLUORESCENT
LAMP BALLAST
34EP

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


Lamp Types

Lamp Types	Wiring Diagram
SANITRON® S2400C Lamp Part No. 05-1311-R	1
GX48L	1
GX48VZ	1
GX48L/4	2
GX48VZ/4	2

This ballast may be acceptable for use with lamps not listed here.
Contact us to discuss your requirement.

Connections

Wiring Diagram 1

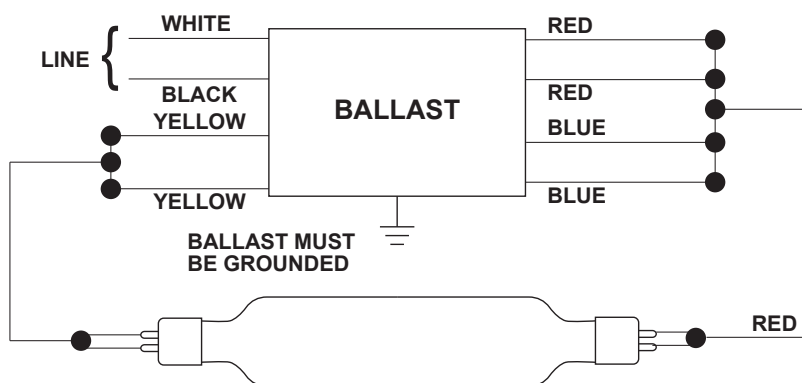

Wiring Diagram 2

Call factory with additional
connection questions
631-273-0500



The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.