


## Specifications

<b>Model Number:</b>	<b>10-1179</b>
<b>Input Voltage:</b>	120 to 277v AC
<b>Frequency:</b>	50/60 Hz.
<b>Lamp Type:</b>	See Chart on Next Page
<b>Size:</b>	5" x 3" x 1.29"
<b>Weight:</b>	16 oz.
<b>Mounting:</b>	Slotted Mounting Tabs

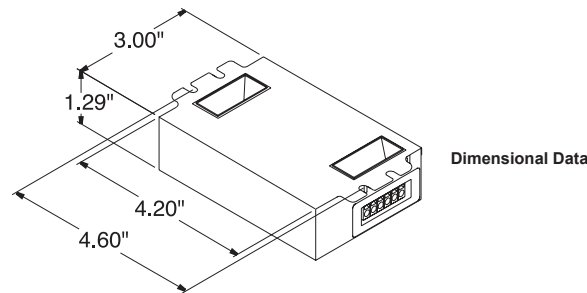

120V to 277V

**INTELLIVOLT**  
120V TO 277V 50/60Hz

LAMP TYPE	LINE CURRENT	MIN START TEMP
(2) PL-L 36W/TUV	0.55A 0.24A	0°F

Also compatible with:  
 (1) PL-L 36W/TUV

**WARNING:** Install in accordance with National and Local Electrical Codes.  
 Use 18AWG Solid Copper Wire.  
 Rated >= 600V.  
 Strip wire to 3/8".

UL LISTED 704G

RoHS COMPLIANT

4435 290 36591 REV. A

7 81087 04507 7

**PHILIPS ADVANCE**  
Technical Information 1.800.372.3331  
 Rosemont, IL

**PureVOLT™**  
**IUV-2S36-M2-LD**  
 Programmed Start Electronic Ballast

ASSEMBLED IN MEXICO

Lamp EOL Protection  
 Ballast a Semi-Conductor  
 High Power Factor  
 Class P Sound Rated A  
 Type 1 Outdoor  
 Inherent Thermal Protection  
 Protection Thermiques Integrees  
 No PCB's

**WIRING: (2) CFL LAMPS (1) CFL LAMP**

**GROUNDING:** Green terminal or ballast case must be grounded

ONLY USE 6-18 AWG, 600V-1000V CORDS

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


## Lamp Types

Lamp Types	Qty.
PL-L36W/TUV (36W)	1 or 2

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

## Connections

**Figure 1 - Wiring Diagram**

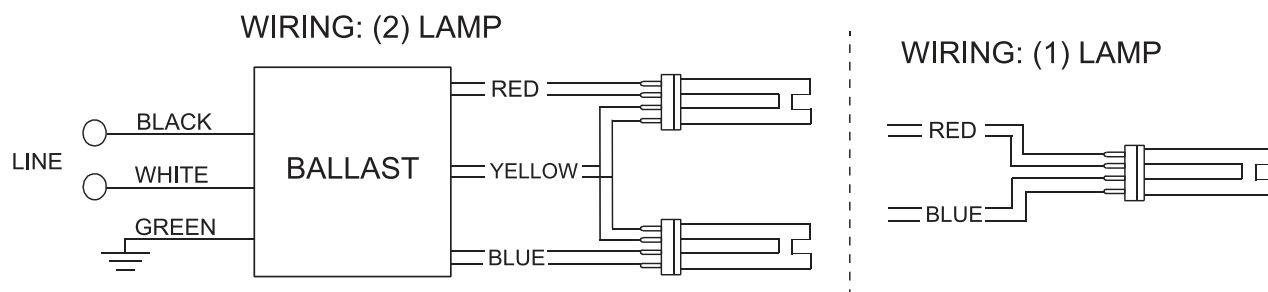

**BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED**  
**For use in permanently connected (fixed) equipment only**

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.