

Specifications

Model Number:	10-0264
Input Voltage:	120 to 277v AC
Frequency:	50/60 Hz.
Lamp Type	See Chart on Next Page
Certifications:	RoHS
Size:	10" x 2.55" x 1.26"
Weight:	2 lbs. 1 oz
Mounting:	Slotted Mounting Tabs



10-0264 120V - 277V 50/60 HZ		<p>SINCE 1963</p> <p>ATLANTIC ULTRAVIOLET CORPORATION</p> <p>631.273.0500 • Sales@AtlanticUV.com Ultraviolet.com • BuyUltraviolet.com</p>	<p>Surelite™ ELECTRONIC BALLAST</p> <p>1 OR 2 x 21-75W T5 425mA 1 OR 2 x GPH436T5-GPH1554T5</p>	<p>INHERENT THERMAL PROTECTION</p> <p>Use 18 AWG Solid Copper Wire Only. Stripped To 3/8"</p> <p>Yellow wires of filament should be series connection when operating 2 lamps.</p> <p>LED TYPE Ø 5mm OR Ø 3mm 3V75mA</p> <p>WARNING: INSTALL BALLAST IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODE. DISCONNECT POWER BEFORE SERVICING. BALLAST MUST BE GROUNDING.</p> <p>LED ON (Lamp Operation)</p> <p>Only use 4-pin connection</p>
<p>L BLK N WHT GRN</p>	<p>INPUT VOLTS: 120-277V AC 50/60 Hz MAX. CURRENT: 1.45A MAX. OUTPUT VOLTAGE/ OUTPUT VOLTAGE TO GROUND: 372V AC</p>	<p>SOUND RATING: A CLASS: P TYPE: 1 OUTDOOR MIN. OPERATING TEMP: 0°C (32°F)</p> <p>70°C max., Tc</p> <p>HIGH POWER FACTOR PREHEAT START</p>		


The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Lamp Types

Lamp Types	Qty.
GPH436T5 – GPH1554T5	1 or 2
TUV36W (05-0582)	1 or 2


Dimensions

Figure 1 - Dimensional Data

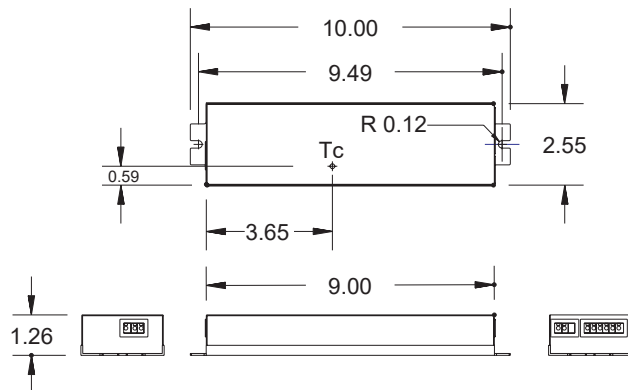

Connections

Figure 2 - Wiring Diagram

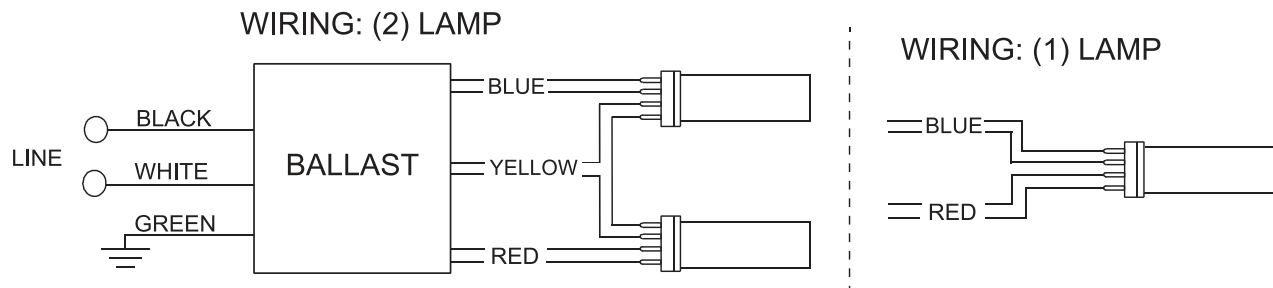

BALLAST CASE OR GREEN TERMINAL MUST BE GROUNDED
For use in permanently connected (fixed) equipment only

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.